

SUDOKU LUCAS

8S/10S/10SH



Drum Rack X1



10" Mesh Snare X1



8" Mesh Tom X3



12" Crash & Hi-hat x2



12" Ride x1



Hi-hat Pedal x1



Drum Allen key x1



Drum L Arm x6



Cymbal Arm x3




Module x1

SET DRUM
ALL PARTS


1. Open the Drum Rack & Use the Drum Allen Key to adjust height

(The picture show already install the Drum L Arm & Cymbal Arm)

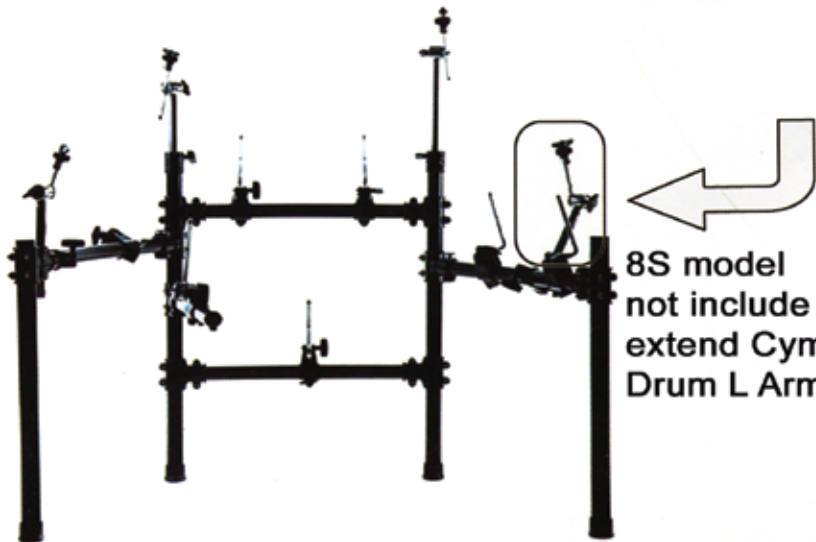

8S model
not include the
extend Cymbal &
Drum L Arm

2. Install the Bass Drum & Drum Pedal



The Long Drum L Arm
use for the Bass Drum

Note:

Ensure the beater to stuck the bass
drum iron plate
Ensure that the beater bass drum is
close to the ground

3. Install Snare Drum Suspension



Unpacked state




Vertical arrangement of L pole

Insert Snare drum
Fix each knob



4. Install Cymbal

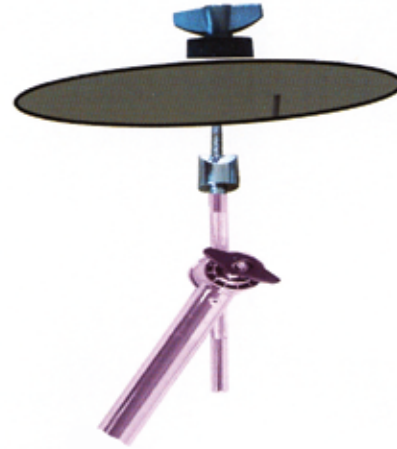

1. Cymbal wiring socket facing right
2. Insert the cymbals so that the cymbals can shake freely


5. Right way to play the Rimshot



6. Right way to choke the Cymbal



There is a sound stop function on the edge about 2cm wide area

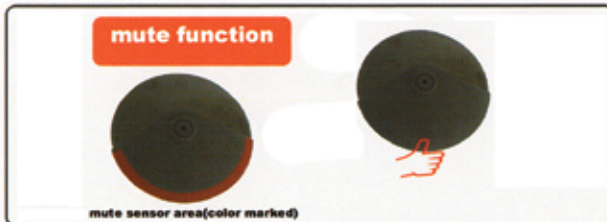


7




Notes:

1. The English version of the cable plug wire sleeve corresponds to the upper position connection
2. HIHAT & CRASH1 & CRASH2 are the same, all TOM drums are the same
3. RIDE is a full-cover dual-jack cymbals (RIDE1 & RIDE2)



↑
Connect headphones

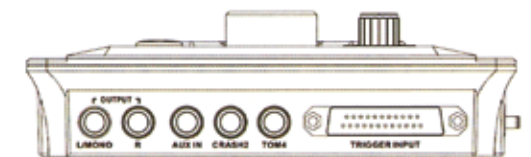

↑
Connect speakers

↑
Single line direct cymbal CRASH2